



UTILITY DOORS

SQUARE AND RADIUS CORNER



Outer frame is delivered pre-squared and ready for installation

Extruded hinges with stainless steel bushings and full-length hinge pin

Pre-cambered galvaneal stile and adjustable strike plate ensures a positive seal

Strong extruded aluminum core surround protects the core edge from damage

ISO 9001:2015 Certified



UTILITY DOORS
SQUARE AND RADIUS CORNER

SERIES 5050 CAMPER DOORS

NO WELD SQUARE AND RADIUS CORNER DOORS



FRAME ASSEMBLY

- Mill finish sloped threshold eliminates in-use paint damage
- Available in black, mill, or white finish

CORE ASSEMBLY

- Damage resistant fiberglass exterior and interior surfaces. Optional aluminum skin available in a variety of popular colors
- Lock options available for various applications

SCREEN DOOR ASSEMBLY

- Extruded aluminum screen door frame is designed to withstand heavy use
- Lever latch secures the screen door to the primary door

SIZES

- Call Widths: 20"-36" with screen door
20"-48" without screen door
- Call Heights: 54"-80"
- Frame Depth: 2.098"
- Core Thickness: 1-3/8"
- Corner Radius 4"
- Rough Opening Dimensions:
Call Width = Rough Opening Dimension
Call Height + 1/4" = Rough Opening Dimension
(Example: 28" x 76" Call Size = 28" x 76-1/4" Rough Opening)

OPTIONS

- Multiple window options are available upon request
- Smooth and embossed exterior skins available in a variety of popular colors
- Multiple lock options are available
- Cross bars on screen door
- Kick panel on screen door
- Friction hinge
- Gas strut
Does not allow door to open greater than 90°
(Available on radius corner only)
- Some options and colors subject to availability and/or minimum order quantities



UTILITY DOORS
SQUARE AND RADIUS CORNER

www.dexteraxle.com

SERIES 5100 - 5150 OUTSWING

AN OUTSWING ENTRANCE DOOR THAT COMBINES BEAUTY, DURABILITY AND EFFICIENCY. IT IS COMPLETELY PREHUNG, READY TO INSTALL. 5100 IS SQUARE CORNER WHILE 5150 IS RADIUS CORNER.



STANDARD FEATURES

- Strong aluminum frame with integral weather baffle
- Extruded hinges, with stainless steel bushings and full-length pin, provide sturdy core to frame connection
- Smooth and embossed exterior skins available in a variety of popular colors
- Damage resistant fiberglass exterior and interior surfaces. Optional aluminum skin available
- Pre-cambered galvanized stile and adjustable strike plate ensure a positive seal
- Standard flush lockset
- Strong, extruded aluminum core surround protects the core edge from damage
- Continuous galvanized stile enhances rigidity and performance
- Crown seal creates superior sealing

OPTIONS AVAILABLE

- Interior and exterior panels are securely bonded to the core
- Lock options available for various applications
- Multiple window options are available upon request
- Screen door option is not available in this door series

SIZES - RADIUS CORNER

- Call Widths: 20"-48"
- Call Heights: 60"-80"
- Frame Depth: 1.345"
- Core Thickness: 1-3/8"
- Corner Radius 4"

SIZES - SQUARE CORNER

- Call Widths: 14"-48"
- Call Heights: 14"-80"
- Frame Depth: 1.231"
- Core Thickness: 1-3/8"
- Rough Opening Dimensions:
Call Width = Rough Opening Dimension
Call Height = Rough Opening Dimension
(Example: 28" x 76" Call Size = 28" x 76" Rough Opening)



UTILITY DOORS
SQUARE AND RADIUS CORNER

5000 SERIES UTILITY DOORS

THE DEXTER DIFFERENCE - ENGINEERED WITH STRENGTH, MANUFACTURED WITH QUALITY, AND SERVICED WITH PRIDE.

Dexter has the only door that comes standard with a galvanized stile inside for added strength, is ISO 9001:2015 certified for quality, with customer service second to none. This makes Dexter the number one choice in doors.

DOOR CAMBER

1/8" to 3/16" Camber



EXTERIOR

- Door is pre-cambered at manufacturer for consistency
- Door does not require adjustment of camber at installation, saving time and money
- Camber enhances weather tight seal
- Door will spring to fit flat or convex walls (5050 radius corner RV door only)

1/8" to 3/16" Camber

Rubber Seal

Weather resistant compression seal reduces leakage and drafts

INTERNAL CONSTRUCTION

Continuous Hinge Pin


Adds strength to prevent door from sagging

Galvanized Stile

Creates a tight seal for strength and durability

Hot Melt Adhesive

Superior process maintains door integrity

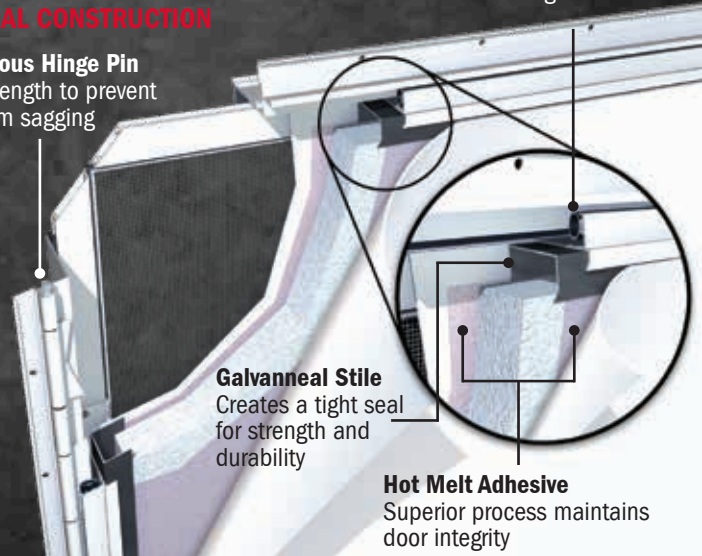

UTILITY DOORS
SQUARE AND RADIUS CORNER

www.dexteraxle.com

Scan to view
Dexteraxle.com

