




HDSS™

SUSPENSION SYSTEM

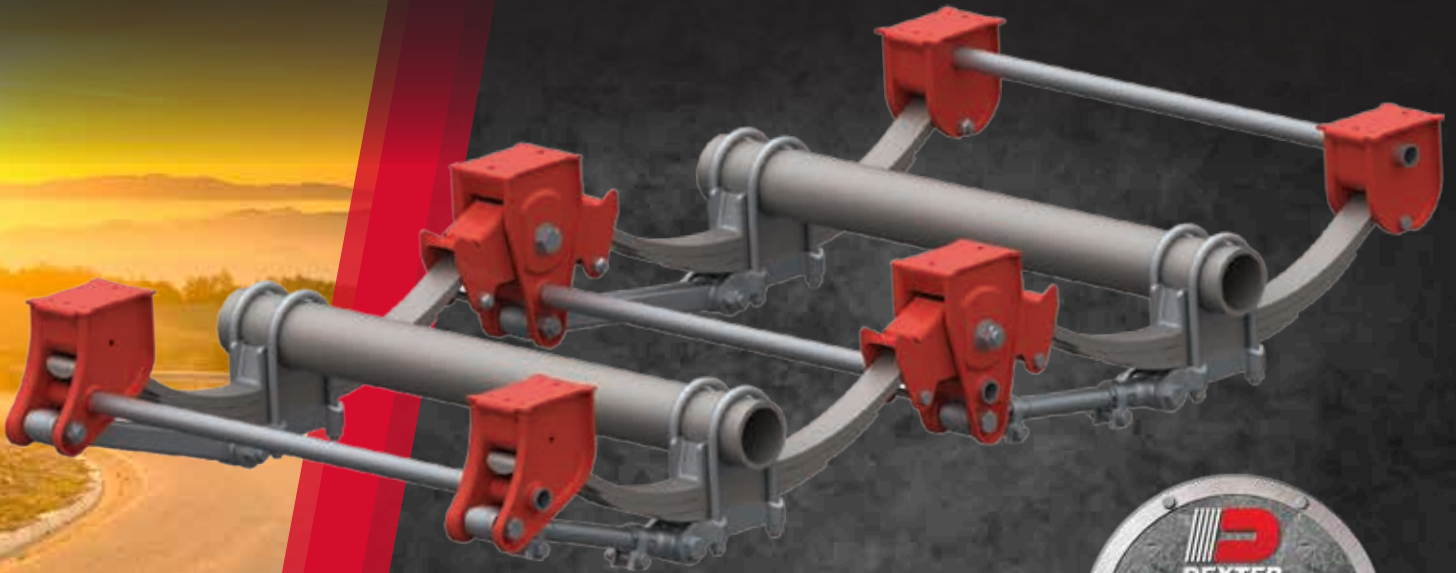

Heavy duty double slipper
mechanical suspension designed
for axles up to 25,000 lbs.

Available in multiple axle spacing
configurations

Axle alignment through the adjustable
trailing rods

Extended life equalizer bushings

Five-year limited warranty

ISO 9001:2015 Certified



SMOOTH OUT THE TOUGHEST ROADS

HEAVY DUTY DOUBLE SLIPPER SPRING MECHANICAL SUSPENSION DESIGNED FOR 5" ROUND AXLE TUBE UP TO 25,000 LBS.

HDSS OPTIONS

- Available in overslung and underslung mounting configurations
- Offered in 49", 54", and 60" axle spacing versions
- Single, tandem, and triple axle sets
- Conventional and Inverted U-Bolt options (inverted on overslung only)
- Two spring options available (11,250# & 12,500# capacity per each)

HDSS FEATURES

- Adjustable trailing rods reduce dog tracking and tire wear
- 3" wide double slipper springs for better tracking and less maintenance
- Heavy duty hangers and equalizers fabricated from lightweight high yield steel
- Extended life equalizer bushings lead to lower maintenance time and cost

UNDERSLUNG - CONVENTIONAL



Tandem



Triple

OVERSLUNG - CONVENTIONAL



Tandem



Triple

INVERTED U-BOLT OPTION (OVERSLUNG ONLY)



www.dexteraxle.com

HDSS[™]
SUSPENSION SYSTEM



Scan to view
dexteraxle.com

